
Performance of impeller cut

As the figure below, when doing the impeller cut of "Impeller A1 (impeller dia. $D2_A$)" to "Impeller A2 (impeller dia. $D2_B$)" and "Impeller A3 (impeller dia. $D2_C$)" respectively, how do total head and efficiency change?



Copyright(C)SotoyamaConsultant

Performance of impeller cut

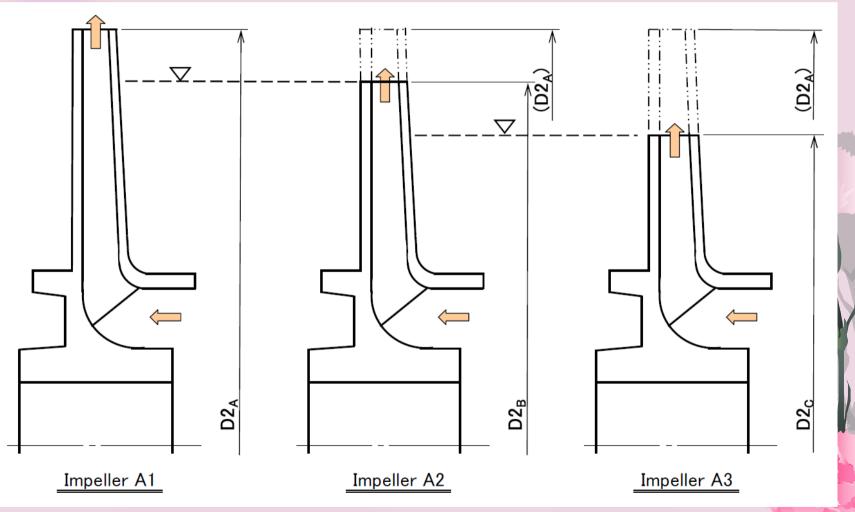